



MODEL: 4808-20-CH / 4808-30-CH  
Superflex Hose

For more information visit

[hoselink.com.au](https://hoselink.com.au)

or call


1300 900 617

Cultivating **Connections**

 [youtube.com/hoselink](https://youtube.com/hoselink)

# User Manual

MODEL: 4808-20-CH / 4808-30-CH  
Superflex Hose

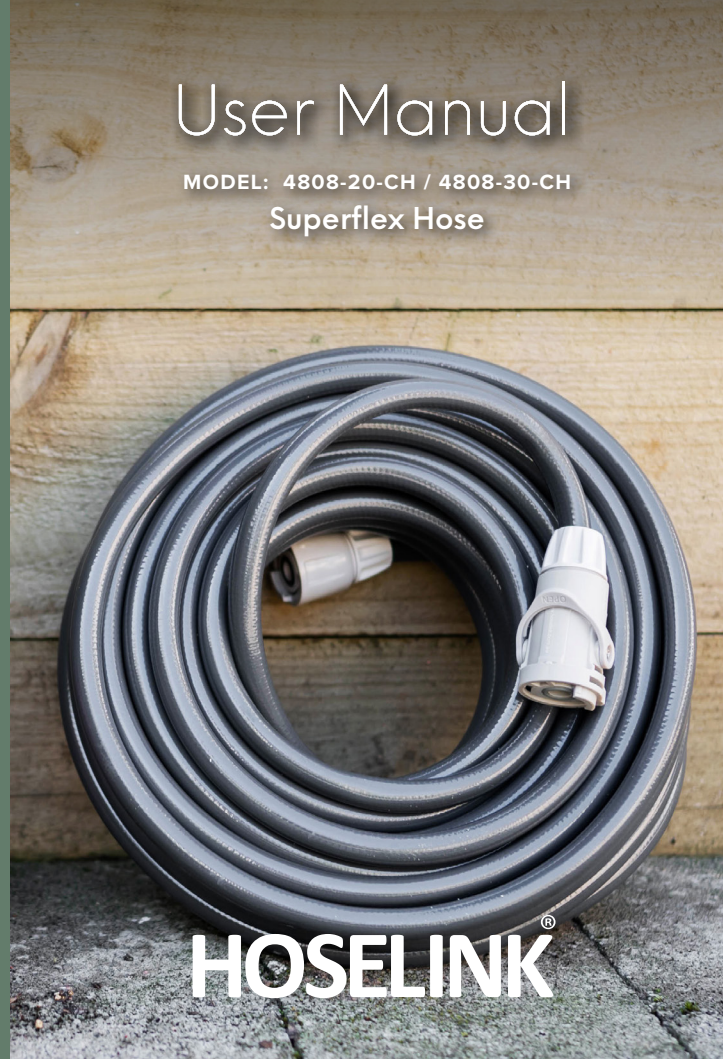

**HOSELINK**<sup>®</sup>

## Kit Contents

---

### 1 x Superflex Garden Hose

This quality hose will remain flexible and easy to use all year round, fitted with our durable no-leak, no-burst hose fittings. To make life even easier, you'll find our Hose Connector with Flow Control on one end designed to shut the water off at the flip of a lever without the need to return to the tap.

Our best-selling hose is specially engineered for strength and durability, with a kink-resistance rating of 9/10. The hose features a four-layer material knit and thick wall design that helps prevent kinks, tangles and twists for years to come.

Featuring high-quality construction built to last, this popular hose has been tested to 500psi and is designed with high abrasion resistance, so there's no need to worry about damage from dirt and debris. This hard-wearing, UV-stabilised hose will also stand up to even the toughest weather conditions, promising to retain its shape and consistency from the height of summer to the frosts of winter, able to withstand temperatures from -5°C to 50°C.

## Before First Use

---

- Unroll and stretch the hose out in a long straight line.
- Allow the hose to relax in the sun for a couple of hours.
- Coil the hose neatly into large loops for ongoing use.

## Precaution

---

### 1 Freezing conditions

Do not leave the hose in freezing conditions for more than a few occasional hours. If it does freeze, bring it back to above 2°C before using it again. Release the water pressure after use.

### 2 Sun conditions

Do not leave the hose in the sun for extended periods if not in use. If hose is to be left in the sun, it is best to turn off water at the tap and release pressure.

### 3 Position hose

Do not permit the hose to lie on the ground/driveway/path for extended periods.

### 4 Hose care

Do not drive your car, lawnmower or any other vehicle over your hose.

### 5 Water care

Do not use it or let it come into contact with liquids other than water.

### 6 Corrosive care

Do not permit the hose to come into contact with corrosive liquids.

## Water Pressure

---

100psi mains water pressure is generally regarded as above average for most parts of Australia. All Hoselink hoses have undergone testing which resulted in burst pressure reading ranging from 400psi to 650psi.

## Warranty

---

Superflex Hose - 8 Years

Hoselink Fittings - 2 Years