


Kit contents

- 1 1x Crank Handle
1x Crank Screw
- 2 1x Leader Hose with Tap and Hose Connectors attached
- 3 1x Water Inlet System with Hoselink connector
- 4 4x Legs
4x Leg screws
- 5 1x Hose Reel Box
1x Premium Metal Spray Gun
1x Accessory Connector with Swivel
1x Hose Clamp
(ITEM 3561 also includes: 1x 30m Hose)

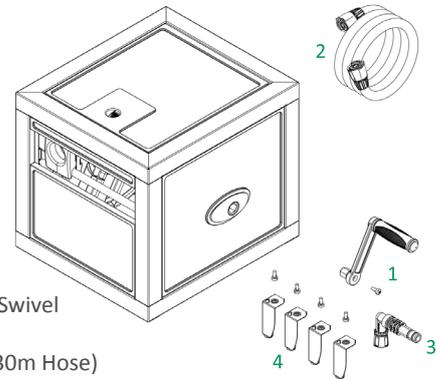


- ✂ Tools Required:**
 Phillips Head Screwdriver

Assembly Instructions

Step 1

Open Hose Reel Box cover and remove the parts box containing: crank with screw, leader hose, water inlet system, Hoselink hose fittings, legs and leg screws.

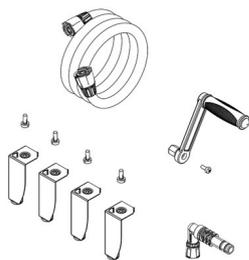


Step 2

⚠ CAUTION


Be careful not to scratch the unit during this step.

While holding the lid closed, rotate the Hose Reel Box upside down and place on a clean, soft working surface. With the open sides of the legs facing inward, attach a leg to each corner with a screw. Return the Hose Reel Box to its normal standing position.

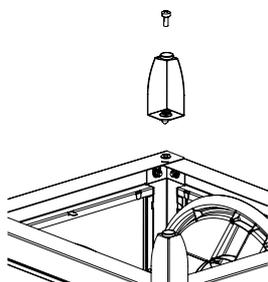


Step 3

Install the Crank Handle on the right hand side of the Hose Reel Box, using the supplied Crank Screw.

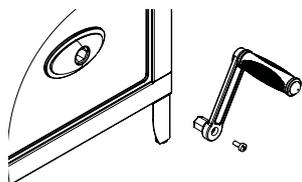


Step 4

Install the Water Inlet System on the left hand side of the unit. This can be positioned to face forward, backward or downward. To install the Water Inlet System, pull the latch down (located on the underside of the water inlet on the side of the Hose Reel Box), insert in the desired orientation and lock by pushing the latch back into place.

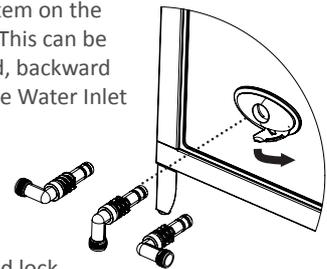

Step 5


Connect the end of the Leader Hose to the Water Inlet System. Ensure it is tight to prevent leaking.



Hose Installation (If installing your own hose)


Step 1

Verify that the hose guide is lined up with the water outlet inside the Hose Reel Box. If necessary, rotate the crank handle until the hose guide is aligned with the water system outlet on the left side of the unit as shown.

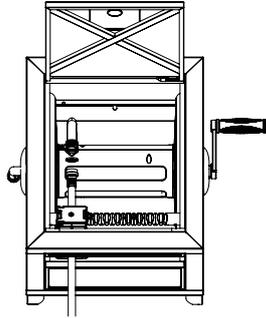

Step 2

Uncoil the garden hose to be installed and insert through the hose guide. Place the included hose clamp over the hose. Push the hose onto the coupling. Align the hose clamp over the hose and coupling and tighten.

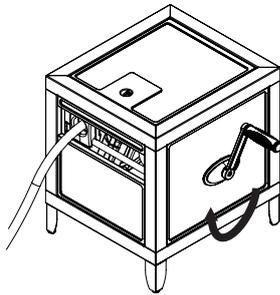

CAUTION


Do not over-tighten the hose clamp.

Step 3

Close the cover and wind the hose back into the box by turning the Crank Handle clockwise. Follow the supplied Hoselink Fitting Instructions to fit the supplied Hoselink Hose Connector to the end of the hose.

Step 4

Screw the Hoselink Tap Connector onto the tap. Connect the end of the Leader Hose to the Tap.



Storage tips

Before rewinding the hose: turn water off at the tap and squeeze the trigger to release pressure from inside the hose. Turn the handle clockwise to reel the hose in.

If possible, the unit is best stored in a shaded area.

Drain water from unit to prevent damage from freezing.